

DOWN DRAFT

Version

Worktop 120 cm - Inox

Collection

Design+

EAN code

8034122348582

KACL.784#46F

Slim motor 600 m³/h

Collection

Accessoires

EAN code

8034122708218



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Scotch brite stainless steel (AISI 304)

Perimeter suction

Touch control + 24 h function

LED lighting

Top filter, removable and washable

Optional remote control

OPTIONAL ACCESSORIES

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

105080053

Remote control

TECHNICAL FEATURES

Installation type

Worktop

Dimensions

120

Finishing

Scotch brite stainless steel (AISI 304)

Type of control

Touch control

Lighting

Led stripe

Ambient lighting

Led strip

Filter

Metallic filter "Top" - 404x216 mm - 2 pz

PACKAGING: WEIGHTS AND VOLUMES

DOWN DRAFT

Worktop 120 cm - Inox

Gross weight

53 kg

Net weight

46 kg

Volume

0,39 m³

Packaging size

Length

1295 mm

Height

810 mm

Depth

370 mm

REMOTE MOTOR

Slim motor 600 m³/h

Gross weight

10 kg

Net weight

9 kg

Volumes

0,07 m³

Packaging size

Length

515 mm

Height

440 mm

Depth

320 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

190 W

Current

220-240V

Frequency

50/60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

560 m³/h

I.E.C. 61591

Maximum noise

66 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

480 Pa

Maximum power motor

190 W

ENERGY CLASS

B

DOWN DRAFT

KACL.784#46F

Slim motor 600 m³/h

Version

Worktop 120 cm - Inox

Collection

Design+

EAN code

8034122348582

Collection

Accessoires

EAN code

8034122708218

MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
Noise dB(A)re1pW-I.E.C.60704-2-13	50	55	60	66
Capacity (m ³ /h) I.E.C.61591 Tubazioni normalizzate	260	330	420	560
Maximum pressure (Pa)	390	430	450	480
Power motor (W)	150	168	180	190
Air outlet		0		

DOWN DRAFT

KACL.784#46F

Slim motor 600 m³/h

Version

Worktop 120 cm - Inox

Collection

Accessoires

Collection

Design+


EAN code

8034122708218

EAN code

8034122348582

ENERGY LABEL

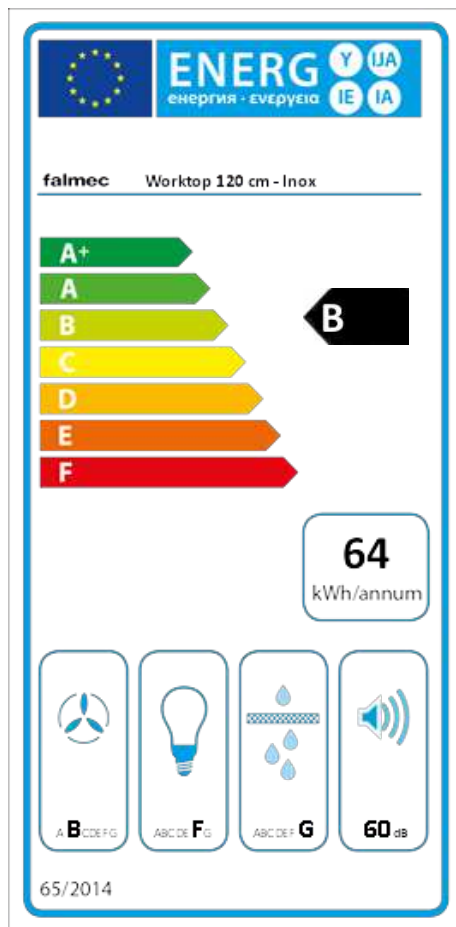

PF		
S	Falmec Spa	
M	Worktop 120 cm - Inox	
AEC	63,9	kWh/a
ECC	B	
FDE	20,9	
FDEC	B	
LE	6,5	
LEC	F	
GFE	36,0	
GFEC	G	
Qmin	260,0	m ³ /h
Qmax	420,0	m ³ /h
Qboost	560,0	m ³ /h
SPEmin	50	dBa
SPEmax	60	dBa
SPEboost	66	dBa
PO	-	W
PS	0,95	W
PI		
F	1,2	
EEl	68,6	
Qbep	289,0	m ³ /h
Pbep	351	Pa
Qboost	560,0	m ³ /h
Wbep	135,0	W
WL	6,50	W
Emiddle	42	lux
Lwa-SPEmax	60	dBa

PF_Product fiche according to 65/2014 / S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / Qmin_Air flow (in m³/h) at min speed in normal use / QQmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SSPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps) / **PI_Additional information according to 66/2014** / F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point maximum air flow / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.