
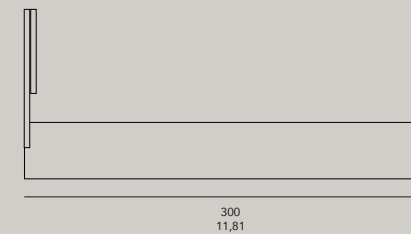



°nook NEW

material aluminium coated
 weight 400 gr
 voltage 24Vdc
 cri >90
 wattage 18W
 dali supported DT8 (option) tunable white
 certifications C€
 classifications IP20 



NOOK.L.C.D.D

Led	WW	2700K 16,5W		
	WW2	3000K 16,5W		
	NW2	4000K 16,5W		
	TW	tunable white (only with IC) 18W 2200-6500°K		
Color body	BK	black matt ral 9011		
	WH	white matt ral 9016		
	AL	aluminium color ral 9006 (on request only)		
Diffuser	FI	frosted ice diffuser (wide beam)	WW	1300 lm / 530 cd
			WW2	1300 lm / 530 cd
			NW2	1300 lm / 530 cd
			TW	
	MP	microprism diffuser (wide beam & anti-glare)	WW	1300 lm / 600 cd
			WW2	1300 lm / 600 cd
			NW2	1300 lm / 600 cd
			TW	
Dimming	IC	fixtures individually dimmable, controlled by DALI DT8		
	OC	track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		