


material aluminium coated  
 weight 260gr / 0.57lb  
 voltage 24Vdc  
 cri >90  
 wattage 16,5W  
 dali supported (option) DALI DT8, tunable white  
 certifications CE, ENEC  
 classifications IP20

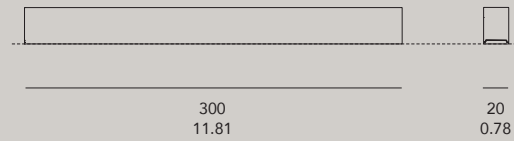


### IN.L.C.D.V.D

Led	<b>WW</b>	2700K   16,5W		
	<b>WW2</b>	3000K   16,5W		
	<b>NW2</b>	4000K   16,5W		
	<b>TW</b>	tunable white (only with IC)   18W   2200-6500°K		
Color body	<b>BK</b>	black matt ral 9011		
	<b>WH</b>	white matt ral 9016		
	<b>AL</b>	aluminium color ral 9006 (on request only)		
Diffuser	<b>FI</b>	frosted ice diffuser	WW	1300 lm / 530 cd
		(wide beam)	WW2	1300 lm / 530 cd
			NW2	1300 lm / 530 cd
	<b>MP</b>	microprism diffuser	TW	
			WW	1300 lm / 600 cd
			WW2	1300 lm / 600 cd
	NW2	1300 lm / 600 cd		
	TW			
Version	<b>T</b>	track mount		
	<b>BI</b>	built in monopoint (plasterkit required)		
Dimming	<b>IC</b>	fixtures individually dimmable, controlled by DALI DT8		
	<b>OC</b>	track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
Accessories	<b>PL.300</b>	monopoint plasterkit 300 mm		
	<b>IN.FI</b>	interchangeable frosted ice diffuser		
	<b>IN.MP</b>	interchangeable microprism diffuser		

# °in small

material aluminium coated  
 weight 140gr / 0.31lb  
 voltage 24Vdc  
 cri >90  
 wattage 10W  
 dali supported (option) DT8  
 certifications CE    
 classifications IP20 



## IN.S.L.C.D.V.D

Led	<b>WW</b>	2700K   10W		
	<b>WW2</b>	3000K   10W		
	<b>NW2</b>	4000K   10W		
Color body	<b>BK</b>	black matt ral 9011		
	<b>WH</b>	white matt ral 9016		
	<b>AL</b>	aluminium color ral 9006 (on request only)		
Diffuser	<b>FI</b>	frosted ice diffuser	WW	485 lm / 180 cd
		(wide beam)	WW2	510 lm / 190 cd
			NW2	535 lm / 200 cd
	<b>MP</b>	microprism diffuser	WW	485 lm / 180 cd
		(wide beam & anti-glare)	WW2	510 lm / 190 cd
			NW2	535 lm / 200 cd
Version	<b>T</b>	track mount		
	<b>BI</b>	built in monopoint (plasterkit required)		
Dimming	<b>IC</b>	fixtures individually dimmable, controlled by DALI DT8 track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
	<b>OC</b>			
Accessories	<b>PL.150</b>	monopoint plasterkit 150 mm		
	<b>IN.S.FI</b>	interchangeable frosted ice diffuser		
	<b>IN.S.MP</b>	interchangeable microprism diffuser		