


°knick

material aluminium coated
 weight 990gr / 2.18lb
 voltage 24Vdc
 cri >90
 wattage 16,5W
 dali supported (option)
 DALI DT8, tunable white
 inclination 90°
 certifications CE, ENEC
 classifications IP20

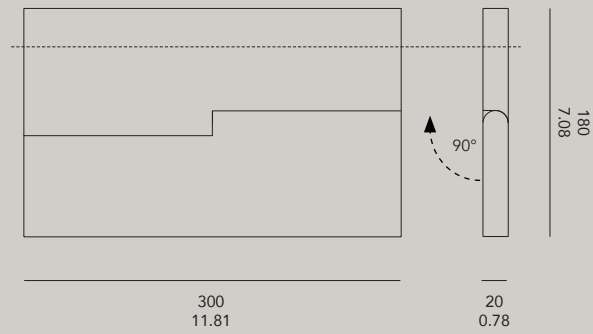


KNICK.L.C.D.V.D

Led	WW WW2 NW2 TW	2700K 16,5W 3000K 16,5W 4000K 16,5W tunable white (only with IC) 18W 2200-6500°K	
Color body	BK WH AL	black matt ral 9011 white matt ral 9016 aluminium color ral 9006 (on request only)	
Diffuser	FI MP	frosted ice diffuser (wide beam) microprism diffuser (wide beam & anti-glare)	WW 1100 lm / 490 cd WW2 1100 lm / 490 cd NW2 1100 lm / 490 cd TW WW 1100 lm / 600 cd WW2 1100 lm / 600 cd NW2 1100 lm / 600 cd TW
Version	T BI	track mount built in monopoint (plasterkit required)	
Dimming	IC OC	fixtures individually dimmable, controlled by DALI DT8 track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)	
Accessories	PL.300 KNICK.FI KNICK.MP	monopoint plasterkit 300 mm interchangeable frosted ice diffuser interchangeable microprism diffuser	

°knick small

material aluminium coated
 weight 350gr / 0.77lb
 voltage 24Vdc
 cri >90
 wattage 9,6W
 inclination 90°
 dali supported (option) DT6
 certifications CE, ENEC, ENEC
 classifications IP20

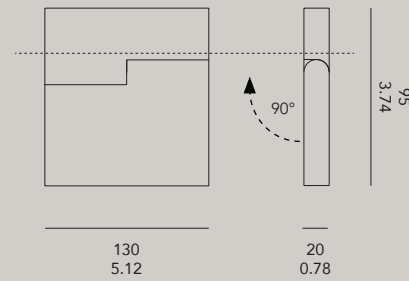

KNICK.S.L.C.D.V.D

Led	WW	2700K 9,6W		
	WW2	3000K 9,6W		
	NW2	4000K 9,6W		
Color body	BK	black matt ral 9011		
	WH	white matt ral 9016		
	AL	aluminium color ral 9006 (on request only)		
Diffuser	FI	frosted ice diffuser (wide beam)	WW	1300 lm / 530 cd
			WW2	1300 lm / 530 cd
			NW2	1300 lm / 530 cd
	MP	microprism diffuser (wide beam & anti-glare)	WW	1300 lm / 600 cd
			WW2	1300 lm / 600 cd
			NW2	1300 lm / 600 cd
	25	optic 25°	WW	785 lm / 2940 cd
			WW2	825 lm / 3075 cd
			NW2	865 lm / 3150 cd
	45	optic 45°	WW	450 lm / 560 cd
			WW2	600 lm / 855 cd
			NW2	640 lm / 860 cd
Version	T	track mount		
	BI	built in monopoint (plasterkit required)		
Dimming	IC	fixtures individually dimmable, controlled by DALI DT6		
	OC	track overall control. dimming possible with 0/1-10V, potentiometer or DALI, on 2 circuits (see pag. 76)		
Accessories	PL.130	monopoint plasterkit 130 mm		